


# GSMD-VBR

## VIBRATION SIGNALING DEVICE FOR CEIA GSMDs

### Main Features


- Plugs directly to the GSMD Headphone Connector
- MIL-D1 and CMD compatible
- No removal needed when Detector is folded
- No maintenance required
- It allows the operator to turn the internal speaker off when the volume knob is at the minimum
- Low Power Consumption
- Embedded 32-bit microcomputer
- Operating at Full Depth with CMD/DW

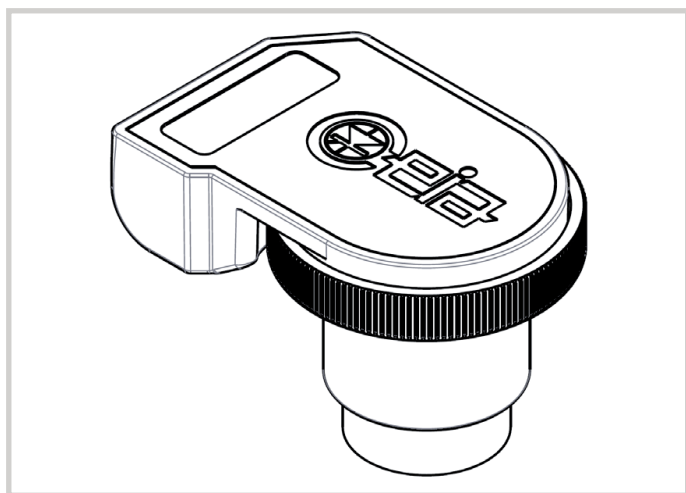

### Technical Specifications

Operating Temperature	-22°F to 158°F
Storage Temperature	-40°F to 176°F
MTBF	200,000 cycles @ 68°F ambient temperature
Power Consumption	GSMD Off: 0 mA
	GSMD On: 14 mA
	GSMD in alarm: 80 mA
Dimensions	2.07" x 1.46" x 1.4"
Weight	0.1 lbs
Protection Degree [according to IEC 529]	IP68

### Mechanical Dimensions

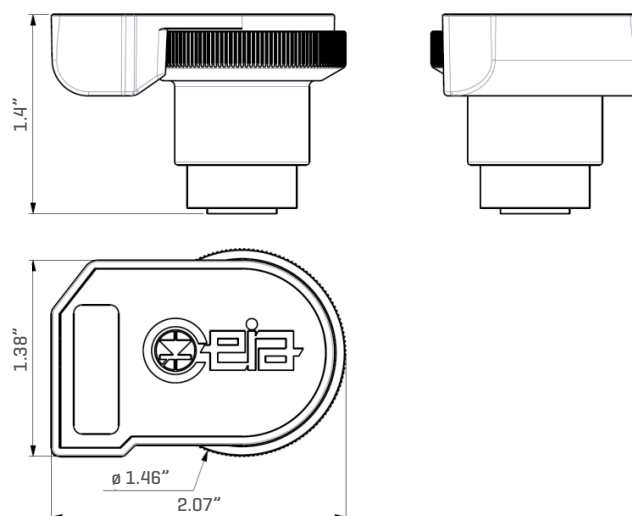

CEIA USA Ltd - 9155 Dutton Drive, Twinsburg OHIO - 44087 USA  
 Phone: 330-405 3190 • Fax: 330-405 3196 • E-mail: gsmd@ceia-usa.com • Call 1-888-532-CEIA

[www.ceia-usa.com](http://www.ceia-usa.com)

CEIA USA reserves the right to make changes, at any moment and without notice, to the models (including programming), their accessories and options, to the prices and conditions of sale

FT140K0032V1000xUS