



TSA
QUALIFIED

MEET ECAC
PERFORMANCE
STANDARD

EMIS[®] series

AUTOMATIC SCREENING FOR NON-METALLIC CARGO

EMIS 130200 FOR PALLETIZED CARGO

KEY FEATURES

- Detect automatically detonators and metal components of explosive devices
- Low cost of ownership
- No dedicated operator
- High throughput
- No ionizing radiation
- Completely solid-state construction [no periodic maintenance or calibration required]

INSPECTION OF

- Flowers and perishable goods
- Paper products
- Textiles and Clothing
- Plastic and wooden products



GSA Contract Holder



www.ceia-usa.com



Threat Detection through Electromagnetics

The **CEIA EMIS (Electro-Magnetic Inspection Scanner)** equipment are security screening devices designed to inspect non-metallic cargo. Using **CEIA exclusive Electromagnetic Profile Analysis technology**, these devices ensure automatic detection of detonators and electronic circuits from IEDs [Improvised Explosive Devices], ammunition and weapons composed of metal [knives, firearms].

In case of detection, the scanners give an audible and visual alarm.

FULLY AUTOMATIC DETECTION

The EMIS is designed to automatically detect detonators and metal components of explosive devices inside paper, newspaper, perishable goods such as produce, fish and meat [fresh or frozen] and organic material in general.

Electromagnetic inspection is the most suitable and quickest method for checking non-metallic cargo. The advanced technology employed in the EMIS minimizes the interaction with the goods themselves and does not depend on visual interpretation of an image by an operator.

DIFFERENT SIZES FOR INSPECTION OF SINGLE PACKAGES OR ENTIRE PALLETS

- **EMIS 8075** for screening of packages.
- **EMIS 130160 - EMIS 130200** for palletized cargo.
- **All models** can be used as a stand alone or in-line inspection device.




EMIS 8075 for package inspection

OVERALL DIMENSIONS

EMIS® 8075 MODEL

- | | |
|-------------------------------------|----------------------|
| ① TUNNEL USEFUL AREA: 31.5" x 29.5" | ④ CONVEYOR BELT |
| ② PROGRAMMING PANEL | ⑤ MOTOR CONTROL UNIT |
| ③ OPTICAL AND ACOUSTIC ALARM | ⑥ ENTRANCE |

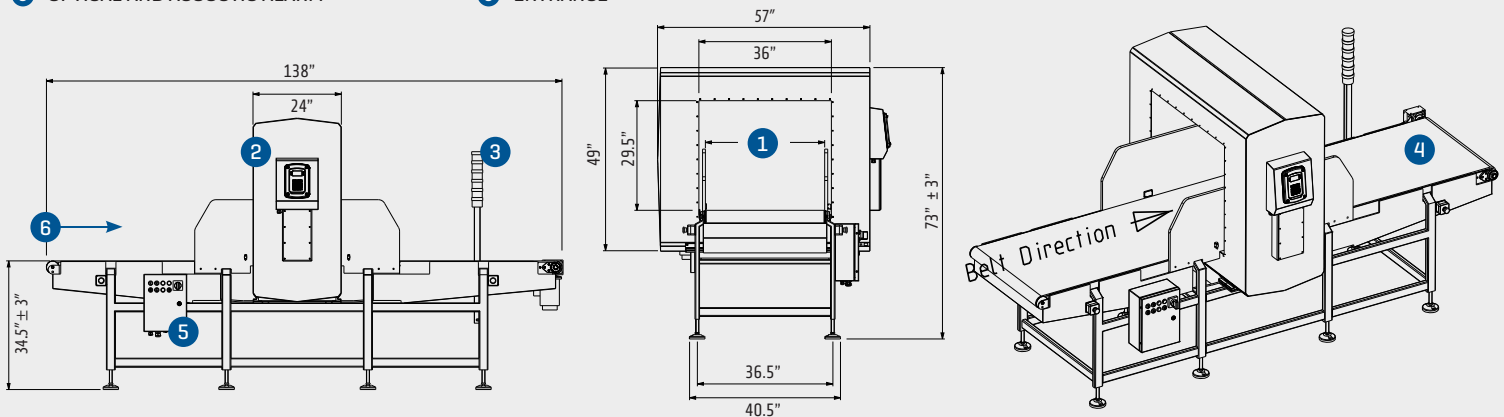

EMIS models 130160 and 130200 are the first available automatic e.m. scanners for inspection of entire pallets of non-metallic cargo. Moreover, the CEIA EMIS Series are the first e.m. scanners that have been qualified according to the TSA Air Cargo Screening Program.

They are also the first devices that have been tested under the ECAC Common Evaluation Process Framework and **meet the ECAC performance standard** for Metal Detection Equipment [MDE].



EMIS-130160 and 130200 for palletized cargo

EFFICIENCY AND LOW COST OF OWNERSHIP


The EMIS offers the ability to automatically screen complete pallets, helping to avoid the need for breakdown and ensuring the highest throughputs are maintained when compared to other approved technologies. The automatic electromagnetic analysis offers a superior level of detection performance guaranteeing the safety of all shipments.

The automated screening process does not require the use of an operator for image interpretation and no regular staff rotation periods for constant operation. Peak periods can be helped by the increased throughput EMIS offers, combined with the ability to redeploy staff normally associated with image interpretation to areas where they are most needed.

The solid-state construction requires no periodic maintenance or calibration ensuring a substantial reduction in the life-cycle costs of the equipment.

EMIS® 130160 - 130200 MODELS

- 1 TUNNEL USEFUL AREA
 - 130160: 51" x 67"
 - 130200: 51" x 78.8"
- 2 PROGRAMMING PANEL
- 3 POWER SUPPLY AND MOTOR CONTROL UNIT
- 4 OPTICAL AND ACOUSTIC ALARM
- 5 ENTRY ROLLER CONVEYOR
- 6 ENTRY CONVEYOR STRUCTURE
- 7 EXIT CONVEYOR STRUCTURE
- 8 EXIT ROLLER CONVEYOR

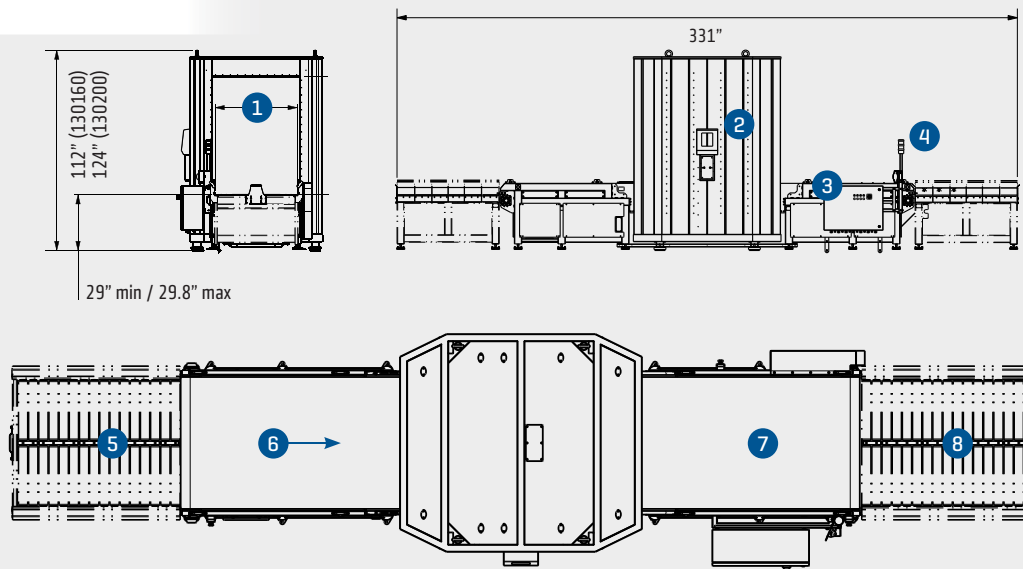



SPECIFICATIONS

DETECTION FUNCTIONS

Analysis of containers of perishable goods and paper without metal content		
CEIA electromagnetic-profile analysis technology		
0.5 ppm by weight Detection Sensitivity at maximum load (130160, 130200 models)		
Tunnel useful area	8075 model: 31.5" x 29.5"	130160 model: 51" x 67" 130200 model: 51" x 78.8"
Height of the conveyor belt	8075 model: 34.5" ± 3" adjustable 130160 - 130200 models: 29" min / 29.8" max	
Maximum Conveyor Load	8075 model: 400 lbs typical – 600 lbs evenly distributed 130160 - 130200 models: 3,307 lbs	
Maximum pallets height	130160 model: 65" - 130200 model: 77"	
Speed/Inspection Time	30 m/min (8075 model) Less than 1 min per pallet (130160 - 130200 models)	

STRUCTURE

Material	AISI 316L Stainless Steel	
Protection degree	IP65	
Weight	8075 model: 1,550 lbs	130160 model: 11,000 lbs 130200 model: 11,350 lbs

POWER SUPPLY

Supply voltage	200-240 V, 50-60 Hz	
Maximum current	11.4 A (8075 model) - 20 A (130160 - 130200 models)	

PROGRAMMING AND COMMUNICATIONS

Modern, rugged and user friendly interface	
Easy to read, high-contrast (3000:1) graphic display	
Rugged, anti-vandalism stainless steel keyboard	
Programming access protected by multiple password levels	
Selection of the operative program	
Programming type	Local, through the built-in keyboard
Memory	125 programs, 100000 storable events
USB Storage device connection	

ALARM FUNCTIONS

Automatic slowing and stopping of the conveyor	
Manual alarm reset and consequent restarting of the conveyor	
Visible and audible alarms	

CONTROL INPUTS

Connection of:	following conveyor authorization, emergency button
Serial interface RS232	Built-in
Bluetooth connection	Built-in (deactivable)
USB Interface	Built-in
Ethernet interface	Built-in 10 - 100 Base-T
Video Camera	Built-in IP camera (130160 - 130200 models)

OUTPUTS

5 programmable relays (30Vca – 2.5A) for the activation of external devices	Ready to load relay
	Ready relay
	Ejector relay
	Preceding conveyor relay
	Item clear relay

ENVIRONMENTAL DATA

- Operating temperature: 14°F to 122°F
- Storage temperature: -13°F to 158 °F
- Relative humidity: 0 to 95% (without condensation)

CONFORMITY

- Conforms to the international standards currently applicable for electrical safety and EMC, and to the applicable EC Regulations
- Complies with Regulations relating to pacemakers, defibrillators or other vital support systems, pregnant women and magnetic storage media (floppy disks, audio cassettes, video cassettes and similar)

APPLICABLE COMMODITY GROUPS

- Grains and animal feed, produce, perishables, bakery goods, dry goods
- Seafood and Meat
- Textiles and Clothing (without metallic accessories)
- Paper products, plastic, rubber
- Printed Material
- Flowers and herbs

FOR THE FOLLOWING CCSF

- Shipping facilities
- Freight Forwarding Facilities
- Third Party Logistics Providers
- Manufacturing Facilities
- Warehouses
- Distribution Centers
- Growers of produce



CEIA USA Ltd - 9155 Dutton Drive, Twinsburg OH - 44087

Phone: 330-405 3190 • Fax: 330-405 3196 • E-mail: security@ceia-usa.com • Call [833] 224-2342 [CEIA]

www.ceia-usa.com